

# 3515302

---



Please read all instructions carefully before use and retain for future reference.



Protective clothing must be worn



**CAUTION** Do not immerse in water.



Protect your eyes.



Wear a dust mask.



Protect your ears.



Protect your hands.



**PRODUCT DISPOSAL INFORMATION** For electrical products sold within the European Community, at the end of the electrical product's useful life, it should not be disposed of with household waste. Please recycle where facilities exist. Contact your local authority for details of collection schemes in your area.

In all circumstances:  
Do not dispose of in domestic waste.  
Do not incinerate.  
Do not abandon in the environment.  
Do not dispose of WEEE as unsorted municipal waste.



## EN

Please read all instructions carefully before use and retain for future reference.

**INTENDED USE** Only operate the power tool/machine for its intended purpose and within the parameters specified in this manual.

This power tool/machine is for domestic use only. Do not use outdoors or on wet surfaces.

This power tool/machine is not intended for use by persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless supervised or given appropriate instruction concerning the product's use by a person responsible for their safety.

**GENERAL PRECAUTION** Do not allow to be used as a toy. Children should be supervised to ensure they do not play with the power tool/machine.

If the power tool/machine is not functioning properly, has been dropped, damaged, left outdoors, or immersed in liquid, do not use, contact DOMU Brands Customer Services.

Do not use the power tool/machine if any parts appear to be faulty, missing or damaged.

Ensure all parts are securely attached before use.

**RISK OF PERSONAL INJURY** Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.

Prevent unintentional starting. Ensure the switch is in the off position before connecting to the power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch, or energising power tools that are switched on, invites accidents.

Do not operate power tools in explosive atmospheres such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.

Always wear eye protection. Any power tool can throw foreign objects into your eyes and cause permanent eye damage. Always wear safety goggles (not glasses) that comply with ANSI safety standard Z87.1. Every day glasses have only impact resistant lenses.

Do not expose power tools to rain or wet conditions. Water entering the power tools will increase the risk of electric shock.

Stay alert, watch what you are doing and use common sense when operating a power tool/machine. Do not use a power tool/machine while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tool/machine may result in serious personal injury.

Use personal protective equipment. Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.

Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.

Carrying power tool/machine with your finger on the switch or energizing power tool/machine that have the switch on invites accidents.

Remove any adjusting key or spanner before turning the power tool/machine on. A spanner or a key left attached to a rotating part of the power tool/machine may result in personal injury.

Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool/machine in unexpected situations.

Dress appropriately. Do not wear loose clothing or jewellery.

Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.

If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

**WORK AREA SAFETY** Keep work area clean and well lit. Cluttered or dark areas invite accidents.

Do not operate power tool/machine in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.

Power tool/machine create sparks which may ignite the dust or fumes.

Keep children and bystanders away while operating a power tool/machine. Distractions can cause you to lose control.

**GENERAL POWER TOOL USE AND CARE** Do not force the power tool/machine. Use the correct power tool/machine for your application. The correct power tool/machine will do the job better and safer at the rate for which it was designed.

Do not use the power tool/machine if the switch does not turn it on and off. Any power tool/machine that cannot be controlled with the switch is dangerous and must be repaired.

Disconnect the plug from the power source and/or the battery pack from the power tool/machine before making any adjustments, changing accessories, or storing power tool/machine tools. Such preventive safety measures reduce the risk of starting the power tool/machine accidentally.

Store idle power tool/machine out of the reach of children and do not allow persons unfamiliar with the power tool/machine or these instructions to operate the power tool/machine.

Power tool/machines are dangerous in the hands of untrained users.

Maintain power tool/machines. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool/machines operation. If damaged, have the power tool/machines repaired before use. Many accidents are caused by poorly maintained power tool/machines.

Keep cutting tools sharp and clean.

Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.

Use the power tool/machine accessories and tool bits in accordance with these instructions, take into account the working conditions and the work to be performed.

Use of the power tool/machine for operations different from those intended could result in a hazardous situation.

**CLEANING & MAINTENANCE** Never soak or immerse electrical components and or a component that has a plug attached.

Disconnect the plug from the power source before making any adjustments, changing accessories, or storing. Such preventive safety measures reduce the risk of starting the power tool accidentally.

Ensure the motor has fully stopped before cleaning, clearing a blockage, checking, or carrying out any maintenance on the tool.

Maintain your power tool. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired by a qualified repair person before use. Many accidents are caused by poorly maintained power tools.

Keep cutting tools sharp and clean. Properly maintained

cutting tools with sharp cutting edges are less likely to bind and are easier to control.

Regularly check external nuts and fixings to ensure vibration caused by normal use has not begun to loosen them.

Store idle power tools out of reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the Breaker.

Locate the power tool out of reach of children, in a dry, locked unit.

Make sure that the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.

Remove the plug from the mains socket / battery (where applicable) before carrying out any adjustment or maintenance.

Always store the power tool/machine in a dry place.

If the power cord is damaged, it must be replaced by a qualified service technician.

Keep the ventilation slots and motor housing as free of dirt and dust as possible (where applicable).

Clean the power tool/machine by rubbing it with a clean cloth and blow it clean using low-pressure compressed air is recommended.

Ensure you have all the pieces listed. If you are missing any components, contact our customer services department at

**support@domu.co.uk**

. DO NOT proceed with assembly if any components are missing.

#### **HAND HELD ROUTERS & TRIMMERS**

Hold the power tool by insulated gripping surfaces when performing an operation where the cutting accessory may contact hidden wiring or its own cord. A cutting accessory contacting a "live" wire may make exposed metal parts of the power tool "live" and could give the operator an electric shock.

Keep hands away from cutting area. Never reach underneath a work piece for any reason. Do not insert fingers or thumb into the vicinity of the accessory/sanding attachments. Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.

Do not overreach. Keep proper footing and balance at all times. This will enable better control of the power tool in unexpected situations.

Disconnect the plug from the power source before making any adjustments, changing accessories or storing. Such preventative safety measures reduce the risk of starting the power tool accidentally.

The accessory will continue to move after releasing the switch. Always switch the tool off and wait for the accessory to come to a complete standstill before putting the tool down.

Do not touch the workpiece or the accessory immediately after operating the tool. They can become very hot.

#### **TECHNICAL SPECIFICATION**

Rated Voltage 220-240V ~

Rated Power 710W

Rated Frequency 50/60Hz

**DECLARATION OF CONFORMITY  
CERTIFICAT DE CONFORMITÉ  
KONFORMITÄTSERKLÄRUNG  
DECLARACIÓN DE CONFORMIDAD  
DICHIARAZIONE DI CONFORMITÀ**

We / Nous / Wir / Nosotras / Noi:

**DOMU Brands Ltd  
5th Floor The Tower  
Deva City Office Park  
Manchester  
M3 7BF**

**DOMU Brands Ltd  
Unit 30, Finlan Road  
Stakehill Industrial Estate  
Middleton, Manchester  
M24 2RW**

Declare under our sole responsibility the product:  
Déclarons, sous notre responsabilité exclusive, que le produit:  
Wir erklären unter unserer alleinigen Verantwortung das Produkt:  
Declaramos bajo nuestra exclusiva responsabilidad el producto:  
Si dichiara sotto nostra esclusiva responsabilità che il prodotto:

SKU  
**3515302**

Description / La description / Beschreibung / Descripción / Descrizione

**Compact Router Deluxe  
Routeur compact Deluxe  
Compact Router Deluxe  
Enrutador compacto Deluxe  
Router compatto Deluxe**

Complies with the essential requirements of the following directives:  
Est conforme aux exigences essentielles des directives suivants:  
Erfüllt die grundlegenden Anforderungen der folgenden Richtlinien:  
Cumple con los requisitos esenciales de las siguientes directivas:  
È conforme ai requisiti fondamentali delle seguenti direttive:










**2006/42/EC  
2014/30/EU  
2011/65/EU**


And the Standards / Et des Normes / Und die Standards / Cumple con los requisitos esenciales de las siguientes directivas / È conforme ai requisiti fondamentali delle seguenti direttive:

**BS EN 60745-1:2009+A11:2010, BS EN 60745-2-17:2010, EN 55014-1:2006+A1+A2, EN 55014-2:2015, EN 61000-3-2:2014, EN 61000-3-3:2013**

Authorised Signatory on behalf of DOMU Brands Ltd.  
Signataire habilité pour le compte de DOMU Brands Ltd.  
Prokurist im Namen von DOMU Brands Ltd.  
Signatario autorizado en nombre de DOMU Brands Ltd.  
Firmatario autorizzato per conto di DOMU Brands Ltd.



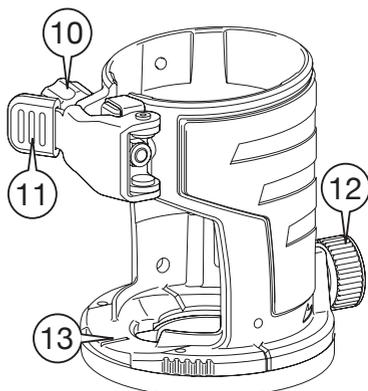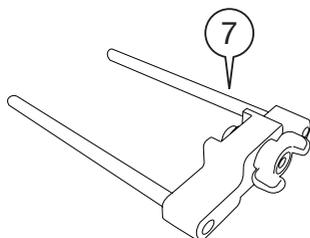
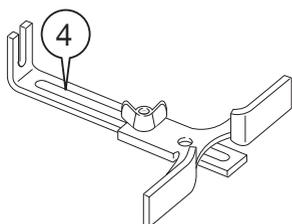







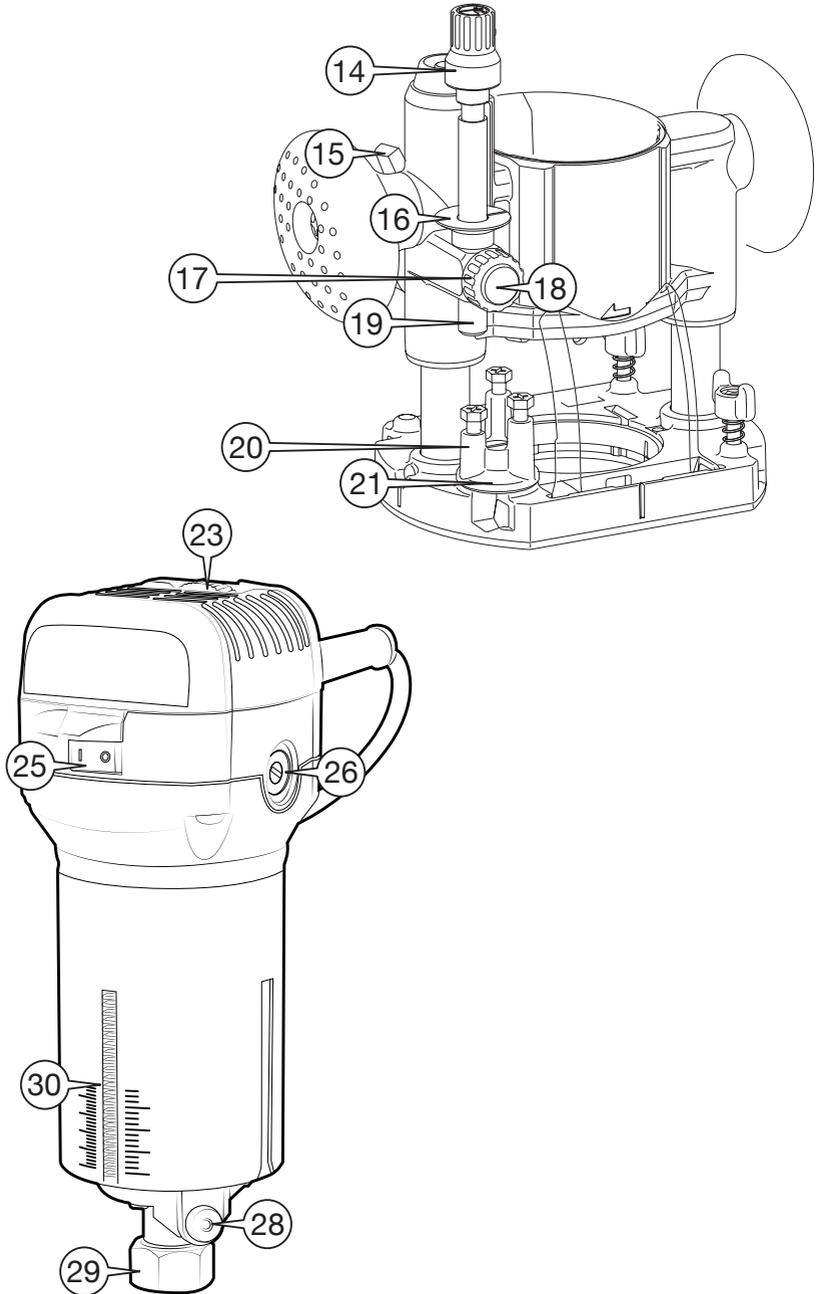


## COMPONENT


---



1. Dust Nozzle for Trimmer Base
2. Dust Nozzle for Plunge Base
3. Replacement Brushes
4. Straight Guide
5. Curved Edge Guide
6. Collet Chuck 3/8"
7. Guide Bar
8. Wrench
9. Collet Chuck 1/4"
10. Adjusting Screw
11. Locking Catch
12. Clamp Screw
13. Round Trimmer Base
14. Adjusting Knob
15. Lock Lever
16. Depth Pointer
17. Stopper Pole Setting Nut
18. Fast-Feed Button
19. Stopper Pole
20. Stopper Block
21. Adjusting Bolt
22. Wing Bolt
23. Speed Adjustment Wheel
24. Power Cable
25. On/Off Switch
26. Brush Cap
27. Scale + Adjustment Runner
28. Collet Nut

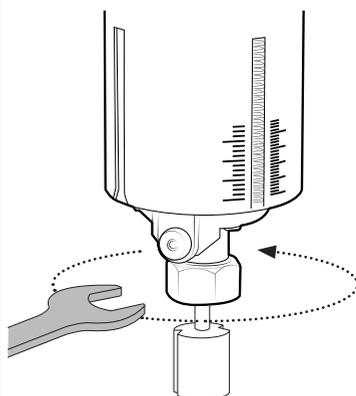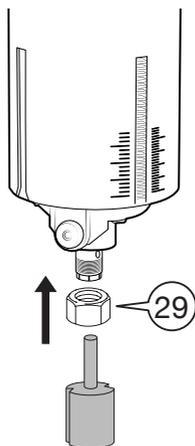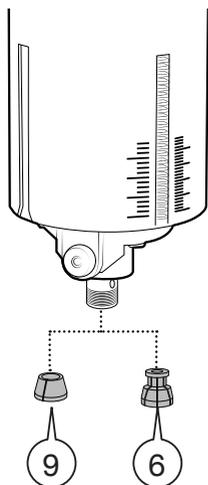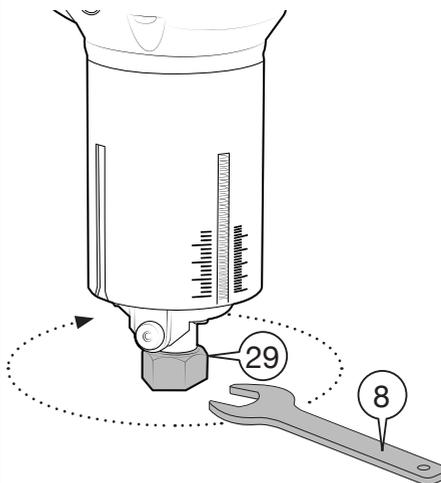
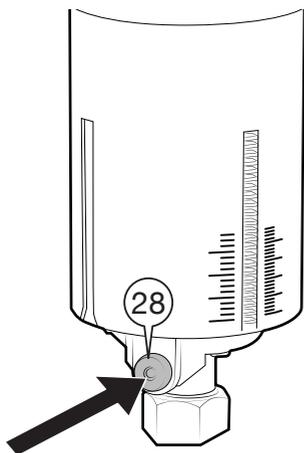


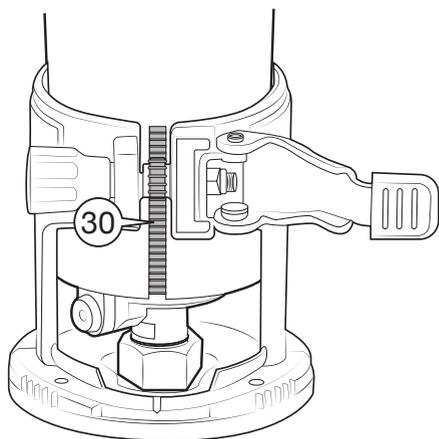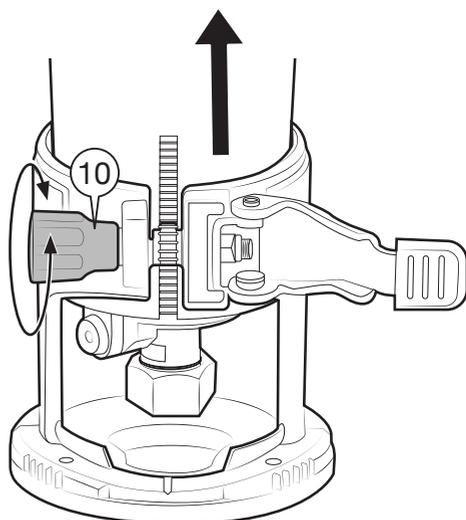
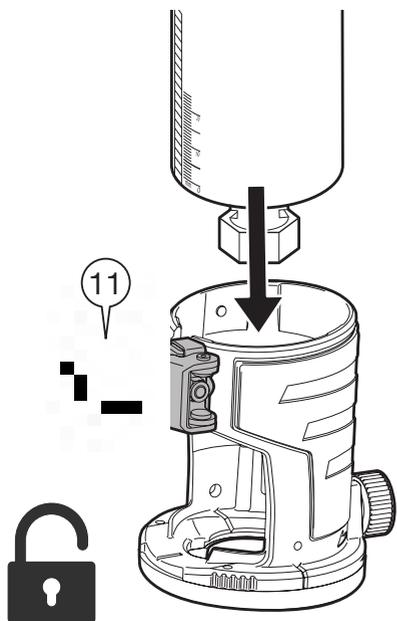


Adjust the height in increments.  
Ajustez la hauteur par incréments.  
Passen Sie die Höhe in Schritten an.  
Ajustar la altura en incrementos.  
Regola l'altezza in incrementi.

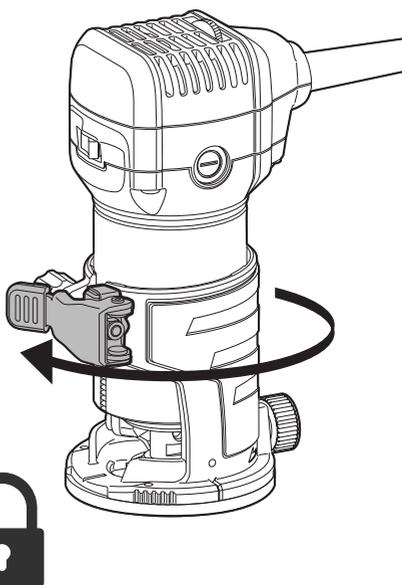

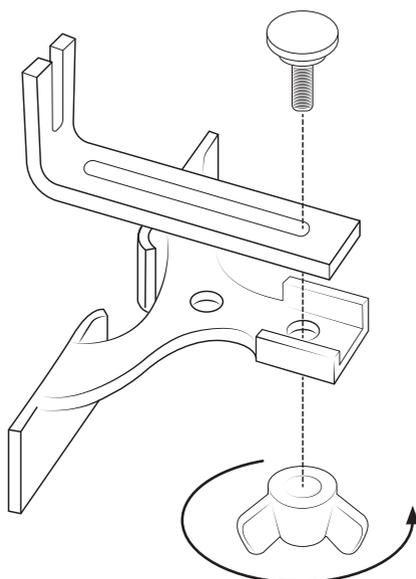
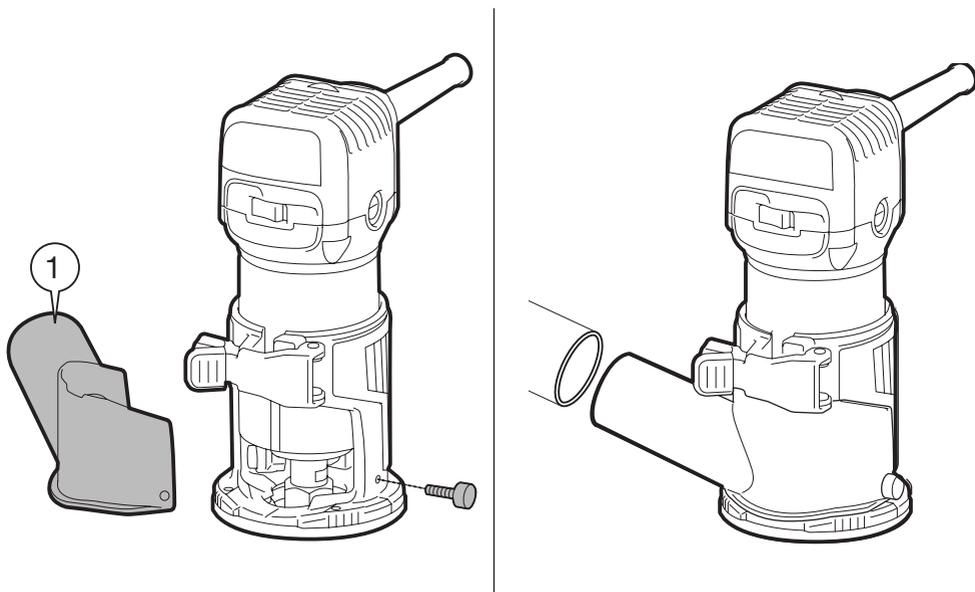



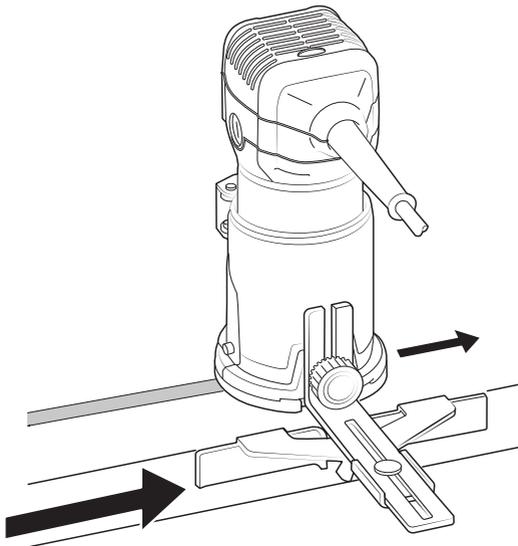
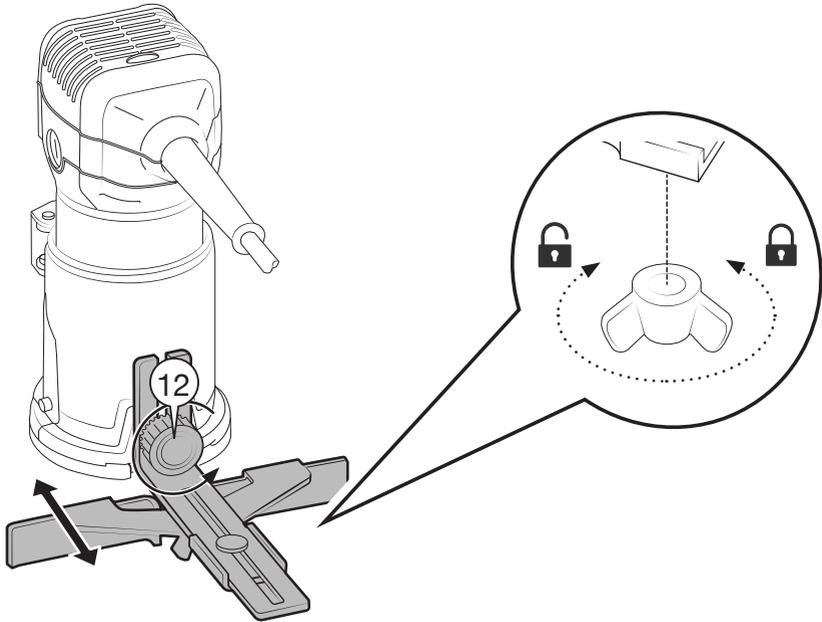


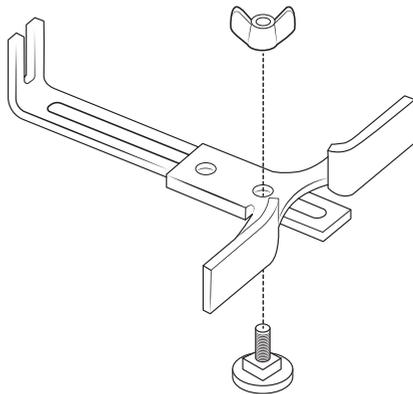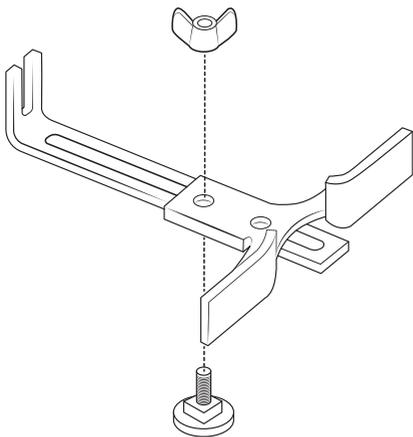


Min 70mm / 2.7"  $\varnothing$   
Max 121mm / 4.7"  $\varnothing$


Min 121mm / 4.7"  $\varnothing$   
Max 221mm / 8.7"  $\varnothing$

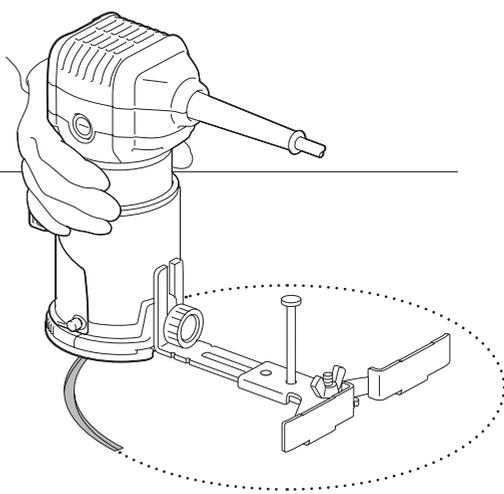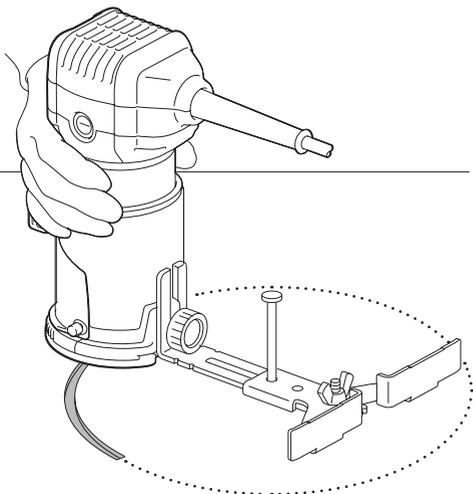

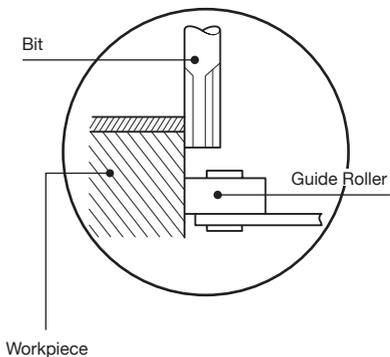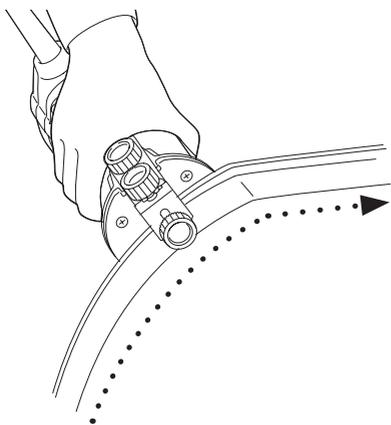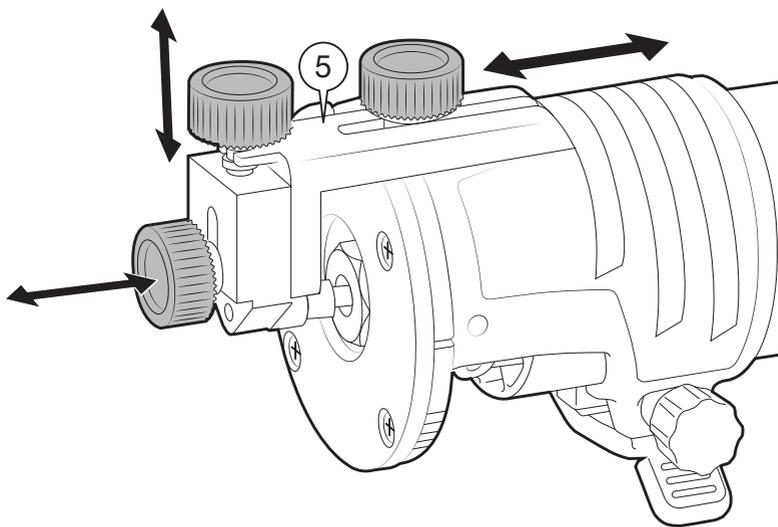

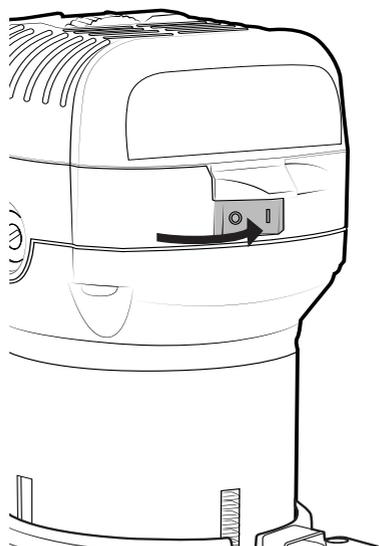

ASSEMBLY / ASSEMBLÉE / VERSAMMLUNG / MONTAJE / MONTAGGIO / EL MONTAJE

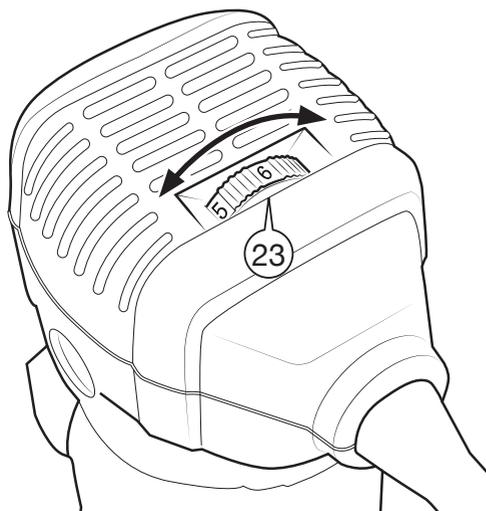

N°	Min <sup>-1</sup>
1	13,000
2	17,000
3	22,000
4	29,000
5	31,000
6	33,000

## ASSEMBLY /

Install the Motor Unit into the Plunge Base, lower into the Base until the installed Bit just touches the flat surface, lock into place using the Lock Lever, and adjust the screw to further tighten into place.

Turn the Stopper Pole Setting Nut (17) counter-clockwise. Lower the Stopper Pole (19) until it makes contact with the Adjusting Bolt (21).

Align the Depth Pointer (16) with the "0" graduation. The depth of cut is indicated by the scale on the Depth Pointer (16).

While pressing the Fast Feed Button (18), raise the Stopper Pole (19) until the desired depth of cut is obtained.

Minute depth adjustment can be obtained by turning the Adjusting Knob (14) (1mm per turn).

By turning the Stopper Pole Setting Nut (17) clockwise, you can fasten the Stopper Pole firmly.

Now the predetermined depth of cut can be obtained by loosening the Lock Lever (15) and then lowering the tool body until the Stopper Pole makes contact with the Adjusting Hex Bolt (20) of the Stopper Block (21).

Always hold the Router by both Handles during operation.


Set the base on the workpiece to be cut without the Bit making any contact. Then power the Router on and wait until the Bit comes to full speed.


Lower the Router body and move the Router forward over the workpiece, keeping the Router base flush and advancing smoothly until the cutting is complete.

When doing edge cutting, the workpiece surface should be on the left side of the bit feed direction.

**CAUTION:** Since the excessive cutting may cause overload of the motor or difficulty in controlling the tool, the depth of cut should be no more than 3mm at a pass when cutting grooves.


If you wish to make cuts deeper than 3mm, make several passes with progressively deeper settings.

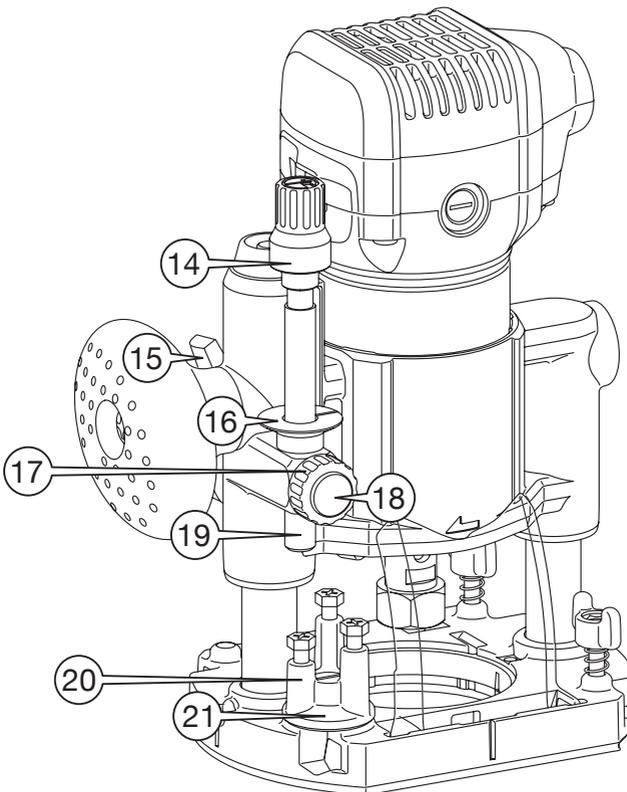

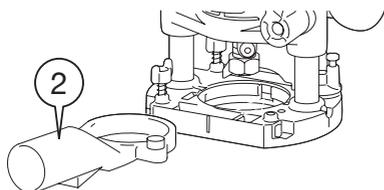


When using the Plunge Base install the Dust Extraction Nozzle (2) onto the Base, secure into place using the Thumb Screw.


Connect the other end to a suitable 35mm vacuum cleaner.

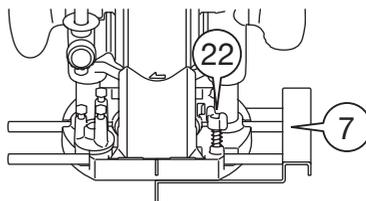

Insert the Guide Bar (7) into the holes in the Plunge Base and tighten the Wing Bolts. To adjust loosen the Wing Bolts (22) adjust and re-tighten.

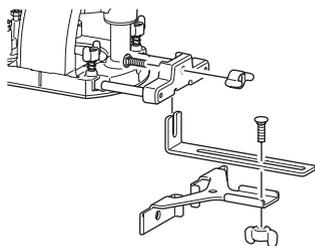

Install the Straight Guide onto the Guide Bar with the Wing Nut.

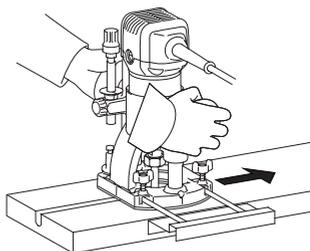


**CAUTION:** Since the excessive cutting may cause overload of the motor or difficulty in controlling the tool, the depth of cut should be no more than 3mm at a pass when cutting grooves. If you wish to make cuts deeper than 3mm, make several passes with progressively deeper settings.

Regularly check and replace the Carbon Brushes (3) when required.

**NOTE:** Always change Carbon Brushes as sets.


To replace, remove use a screwdriver to remove the Brush Holder Caps (26).

Remove the worn Carbon Brushes and insert the new ones and replace the Brush Holder Caps.

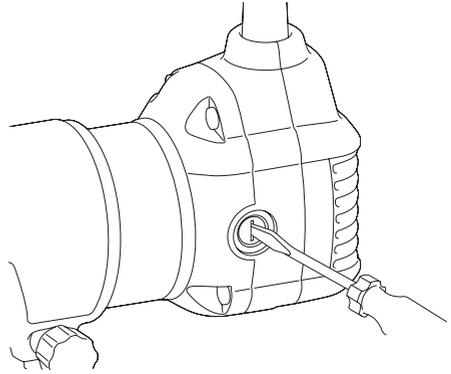

ASSEMBLY / AS-

---

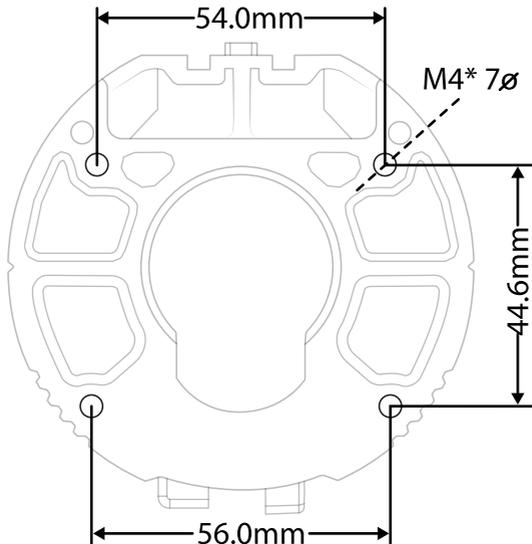



## EN

**DISPOSAL INFORMATION** Please recycle where facilities exist. Check with your local authority for recycling advice.

**CUSTOMER SERVICE** If you are having difficulty using this product and require support, please contact [support@domu.co.uk](mailto:support@domu.co.uk)

**WARRANTY** To register your product and find out if you qualify for a free extended warranty please go to [www.vonhaus.com/warranty](http://www.vonhaus.com/warranty). Please retain a proof of purchase receipt or statement as proof of the purchase date. The warranty only applies if the product is used solely in the manner indicated in the warnings page of this manual, and all other instructions have been followed accurately. Any abuse of the product or the manner in which it is used will invalidate the warranty. Returned goods will not be accepted unless re-packaged in its original packaging and accompanied by a relevant and completed returns form. This does not affect your statutory rights. No rights are given under this warranty to a person acquiring the appliance second-hand or for commercial or communal use.

**COPYRIGHT** All material in this instruction manual are copyrighted by DOMU Brands. Any unauthorised use may violate worldwide copyright, trademark, and other laws.

## THANK YOU

Thank you for purchasing your product/appliance. Should you require further assistance with your purchase, you can contact us at [support@domu.co.uk](mailto:support@domu.co.uk)

VonHaus is a registered trademark of DOMU Brands Ltd. Made in China for DOMU Brands. M24 2RW.